

## ASi-5 – Great data bandwidth, short cycle times

4 x counter inputs, individually configurable and parameterizable as:

- 4 x 2-channel input
- or
- 4 x 1-channel input

A/B inputs

Frequency and period duration measurement with and without filtering


Impulse counter and Encoder (24 V)

High protection category IP67



(Figure similar)



| Figure  | Housing | Inputs digital     | Range of values <sup>(1)</sup>                 | Counting rate   | Input voltage (sensor supply) <sup>(2)</sup> | ASi connection <sup>(3)</sup> | ASi address <sup>(4)</sup> | Article no.    |
|---|---------|--------------------|--|-----------------|--|-------------------------------|----------------------------|----------------|
|  | 4 x M12 | 4 x counter inputs | impulse:<br>-2147483647 ...<br>2147483647 dec. | max.<br>250 kHz | out of ASi                                   | ASi profile cable             | 1 ASi-5 address            | <b>BWU4042</b> |

(1) From Ident. No. ≥18955, for Ident. No. <18955 range of values -32768 ... 32767 dec.

(2) **Input voltage (sensor supply):** Inputs are supplied by ASi or by AUX (auxiliary 24 V power). If supplied by ASi, inputs shall not be connected to earth or to external potential.

(3) **ASi connection:** The connection to ASi as well to AUX (auxiliary 24 V power) is made via yellow resp. black ASi profile cable with piercing technology or via M12 socket (in IP20 via clamps).

(4) **ASi address:** AB addresses (max. 62 AB addresses/ASi network), 2 AB addresses (max. 31 modules with 2 AB addresses), Single addresses (max. 31 Single addresses/ASi network), ASi-5 address (max. 62 ASi-5 addresses/ASi network), mixed use allowed. Upon request, ASi-3 nodes are available with specific ASi no-de profiles. For modules with two ASi-3 nodes the 2nd ASi-3 node is turned off as long as the 1st ASi-3 node is addressed to address "0".

|  |              |   |
|--|--------------|---|
| <b>Article No.</b>                                       |              | <b>BWU4042</b>  |
| <b>General data</b>                                      |              |   |
| Device type  |              | counter input   |
| <b>Connection</b>  |              |   |
| ASi connection   |              | profile cable and piercing  |
| Periphery connection                                     |              | M12   |
| Length of connector cable                                |              | I/O: 20 m <sup>(1)</sup>  |
| <b>ASi</b>   |              |   |
| Address  |              | 1 ASi-5 address   |
| Required master profile                                  |              | M5  |
| Since ASi specification                                  |              | 5   |
| ASi process data width                                   |              | 8 byte <sup>(2)</sup>   |
| Operating voltage  |              | 30 V (18 ... 31.6 V)  |
| Max. current consumption                                 |              | 245 mA  |
| Max. current consumption without sensor/ actuator supply |              | 45 mA   |
| <b>Input</b>   |              |   |
| Number   |              | depending on configuration:<br>4 x 1-channel<br>4 x 2-channel   |
| Counting rate  |              | max. 250 kHz  |
| Range of value   |              | impulse: -2147483647 ... 2147483647 dec. (start value configurable) <sup>(3)</sup>  |
| Power supply   |              | out of ASi  |
| Sensor supply  |              | short-circuit and overload protected according to EN 61131-2  |
| Power supply of attached sensors                         | up to +40 °C | 200 mA <sup>(4)</sup>   |
|  | at +55 °C    | 140 mA <sup>(4)</sup>   |
|  | at +70 °C    | 120 mA <sup>(4)</sup>   |
| Impulse counter and Encoder (24 V)                       |              | The required input signal level is < 5V for a low-signal and > 15V for a high signal.   |
| <b>Display</b>   |              |   |
| LED ASi (green)  |              | on: ASi voltage on<br>flashing: ASi voltage on, but peripheral fault <sup>(5)</sup> or address 0<br>off: no ASi voltage   |
| LED FAULT (red)  |              | on: ASi address 0 or ASi participant offline<br>flashing: peripheral fault <sup>(5)</sup><br>off: ASi participant online  |
| LED C1A ... CnA (yellow)                                 |              | <b>1-channel mode</b><br>on: signal at pulse counter input 1 ... 4 (Pin4)<br>off: no signal   |
|  |              | <b>2-channel mode with 4-times evaluation</b><br>on: rising/falling edge at channel A of counter input 1 ... 4 (Pin2)   |
|  |              | <b>2-channel mode without 4-times evaluation</b><br>on: period recognized   |
| LED C1B ... CnB (yellow)                                 |              | <b>1-channel mode</b><br>on: status input 1 ... 4 (Pin2) active if bit USE CHx = 1 <sup>(5)</sup><br>off: status input 1 ... 4 (Pin2) not active if bit USE CHx = 1 <sup>(5)</sup> or bit USE CHx = 0 |
|  |              | <b>2-channel mode with 4-times evaluation</b><br>on: rising/falling edge at channel B of counter input 1 ... 4 (Pin2)   |
|  |              | <b>2-channel mode without 4-times evaluation</b><br>no function   |


|  |  |
|--|--|
| <b>Article No.</b>   | <b>BWU4042</b>   |
| <b>Environment</b>   |  |
| Applied standards  | EN 61000-6-2<br>EN 61000-6-3<br>EN 61131-2<br>EN 60529           |
| It can be used with a switched AUX cable, which is passively safe up to SIL3/PLe | yes <sup>(6)</sup>   |
| Operating altitude   | max. 2000 m  |
| Ambient temperature  | -30 °C ... +55 °C (up to max. +70 °C) <sup>(4) (7)</sup>         |
| Storage temperature  | -25 °C ... +85 °C  |
| Housing  | plastic, for screw mounting                                      |
| Pollution degree   | 2  |
| Protection category  | IP67   |
| Tolerable loading referring to humidity  | acc. EN 61131-2  |
| Max. tolerable shock load  | 30g, 11 ms, acc. EN 61131-2                                      |
| Max. tolerable vibration stress  | 5 ... 8 Hz 50 mm <sub>pp</sub> /8 ... 500 Hz 6g, acc. EN 61131-2 |
| Insulation voltage   | ≥ 500 V  |
| Weight   | 200 g  |
| Dimensions (W / H / D) in mm   | 45 / 80 / 38 (without substructure)                              |

(1) Loop resistance ≤ 150 Ω

(2) The ASi-5 process data bandwidth depends on the ASi-5 profile. Further selectable profiles can be found in the hardware catalog of the Bihl+Wiedemann Suite or in the configuration manual.

(3) From Ident. No. ≥ 18955, for Ident. No. < 18955 range of values -32768 ... 32767 dec.

(4)

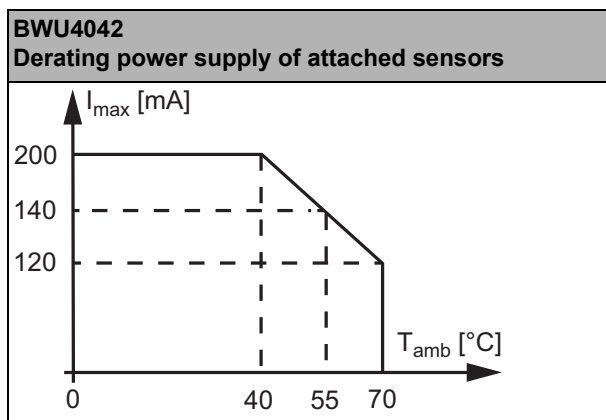


(5) See table "Peripheral fault indication"

(6) The module is suitable for use in passively safe paths as it has no connection to an AUX potential.

(7) Maximum ambient operating temperature +55 °C according UL certificate for the use in the USA and Canada

## Dimensional drawings

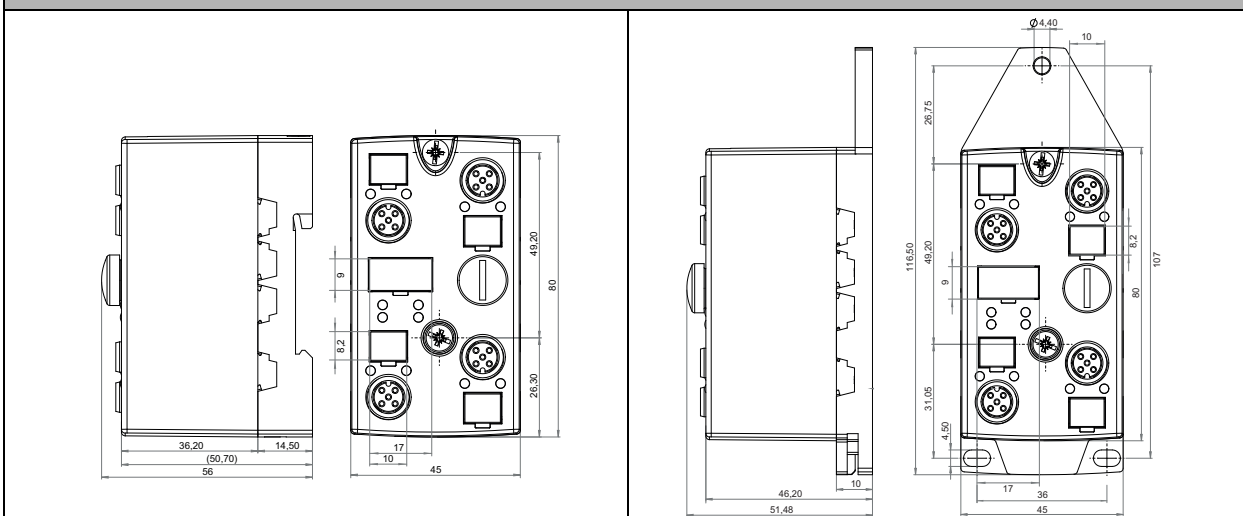

| Article no. | Peripheral fault indication               |                       |   |
|-------------|---|-----------------------|---|
|             | counter overflow/underflow and RO Chx = 0 | input short circuited | status input (Pin2) in 1-channel mode is not active but bit USE CHx = 1 |
| BWU4042     | •   | •                     | •   |

## UL-specifications (UL508)

### BWU4042

|                     |   |
|---------------------|---|
| External protection | An isolated source with a secondary open circuit voltage of $\leq 30 V_{DC}$ with a 3 A maximum over current protection. Over current protection is not required when a Class 2 source is employed. |
| In general          | UL mark does not provide UL certification for any functional safety rating or aspects of the above devices.   |

## Programming (ASi Bit-setting) standard profile - factory default setting

| Article no. | Byte                               | Bit                                |    |    |    |    |    |    |    |
|-------------|------------------------------------|------------------------------------|----|----|----|----|----|----|----|
|             |                                    | D7                                 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|             |                                    | Input                              |    |    |    |    |    |    |    |
| BWU4042     | 0                                  | Channel 1 counter value, low byte  |    |    |    |    |    |    |    |
|             | 1                                  | Channel 1 counter value, high byte |    |    |    |    |    |    |    |
|             | 2                                  | Channel 2 counter value, low byte  |    |    |    |    |    |    |    |
|             | 3                                  | Channel 2 counter value, high byte |    |    |    |    |    |    |    |
|             | 4                                  | Channel 3 counter value, low byte  |    |    |    |    |    |    |    |
|             | 5                                  | Channel 3 counter value, high byte |    |    |    |    |    |    |    |
|             | 6                                  | Channel 4 counter value, low byte  |    |    |    |    |    |    |    |
| 7           | Channel 4 counter value, high byte |                                    |    |    |    |    |    |    |    |

| Article no. | Byte   | Bit  |        |         |         |        |        |        |        |
|-------------|--|--|--------|---------|---------|--------|--------|--------|--------|
|             |  | D7   | D6     | D5      | D4      | D3     | D2     | D1     | D0     |
|             |  | Output                                       |        |         |         |        |        |        |        |
| BWU4042     | 0  | reserved <sup>(1)</sup>                      | RO Ch1 | USE Ch1 | 4TE Ch1 | 2C Ch1 | CW Ch1 | SV Ch1 | RS Ch1 |
|             | 1  | Prescaler Index Ch1 (integer) <sup>(2)</sup> |        |         |         |        |        |        |        |
|             | 2  | reserved <sup>(1)</sup>                      | RO Ch2 | USE Ch2 | 4TE Ch2 | 2C Ch2 | CW Ch2 | SV Ch2 | RS Ch2 |
|             | 3  | Prescaler Index Ch2 (integer) <sup>(2)</sup> |        |         |         |        |        |        |        |
|             | 4  | reserved <sup>(1)</sup>                      | RO Ch3 | USE Ch3 | 4TE Ch3 | 2C Ch3 | CW Ch3 | SV Ch3 | RS Ch3 |
|             | 5  | Prescaler Index Ch3 (integer) <sup>(2)</sup> |        |         |         |        |        |        |        |
|             | 6  | reserved <sup>(1)</sup>                      | RO Ch4 | USE Ch4 | 4TE Ch4 | 2C Ch4 | CW Ch4 | SV Ch4 | RS Ch4 |
| 7           | Prescaler Index Ch4 (integer) <sup>(2)</sup> |  |        |         |         |        |        |        |        |

- (1) Reserved bits have to be set to zero, otherwise an timer error could occur.  
 (2) see table "Prescaler Index"

| Name    | Explanation  |
|---------|--|
| RO Chx  | <b>Rollover:</b><br>0 = Counter stops at highest/lowest value in case of overflow/underflow<br>1 = Counter counts with lowest/highest value in case of overflow/underflow  |
| USE Chx | <b>use Pin2 channel x</b><br>0 = in 1-channel mode (pulse counter) Pin2 is ignored<br>1 = in 1-channel mode (pulse counter) Pin2 is used as status input   |
| 4TE Chx | <b>4-times evaluation:</b><br>0 = no 4-times evaluation<br>1 = in the 2-channel counting mode (bit 2C CHx = 1) rising and falling edges on both channels are counted separately.   |
| 2C Chx  | <b>counter mode channel x</b><br>0 = 1-channel input counter (pulse counter)<br>1 = 2-channel input counter (encoder)  |
| CW Chx  | <b>direction of rotation channel x</b><br>1-channel input counter (bit 2C Chx = 0)<br>0 = counting upwards<br>1 = counting downwards<br>2-channel input counter (bit 2C Chx = 1)<br>0: CxB before CxA = counting upwards<br>1: CxB before CxA = counting downwards |
| SV Chx  | <b>start value channel x</b><br>0 = start value 0 (default = 0)<br>1 = start value 1 (default = -2147483647)   |
| RS Chx  | <b>reset channel x</b><br>RS changes from 0 to 1: counter starts with start value 0 resp. start value 1<br>RS changes from 1 to 0: counter stops and keeps last value  |

| Article no. | Prescaler Index |          |     |   |     |    |    |    |   |   |   |   |
|-------------|-----------------|----------|-----|---|-----|----|----|----|---|---|---|---|
| BWU4042     | Index (dec)     | 255      | ... | 8 | 7   | 6  | 5  | 4  | 3 | 2 | 1 | 0 |
|             | Prescale value  | reserved |     |   | 128 | 64 | 32 | 16 | 8 | 4 | 2 | 1 |

### Notice

For information on the process and parameter data of the extended profile (available from Ident. No. =18955), please refer to the configuration manual of the counter modules.



### Pin assignment

| Signal name               | Explanation   |
|---------------------------|---|
| C x channel A, B          | counter input x channel A, B (2-channel mode)           |
| Status x                  | status input x (1-channel mode)                         |
| Pulse x+                  | pulse counter input x, high rise (1-channel mode)       |
| 24V <sub>out of ASi</sub> | power supply, out of ASi, positive pole (sensor supply) |
| 0V <sub>out of ASi</sub>  | power supply, out of ASi, negative pole (sensor supply) |
| Shield                    | shield  |




| Connections |  |                                      |                            |              |                           |              |      |
|-------------|--|--------------------------------------|----------------------------|--------------|---------------------------|--------------|------|
| Article no. | M12 connection                               | Marking                              | Pin1                       | Pin2         | Pin3                      | Pin4         | Pin5 |
| BWU4042     | <b>Configuration as: 4 x 2-channel input</b> |                                      |                            |              |                           |              |      |
|             | X1   | C1A/C1B                              | 24 V <sub>out of ASi</sub> | C1 Channel B | 0 V <sub>out of ASi</sub> | C1 Channel A | n.c. |
|             | X2   | C2A/C2B                              | 24 V <sub>out of ASi</sub> | C2 Channel B | 0 V <sub>out of ASi</sub> | C2 Channel A | n.c. |
|             | X3   | C3A/C3B                              | 24 V <sub>out of ASi</sub> | C3 Channel B | 0 V <sub>out of ASi</sub> | C3 Channel A | n.c. |
|             | X4   | C4A/C4B                              | 24 V <sub>out of ASi</sub> | C4 Channel B | 0 V <sub>out of ASi</sub> | C4 Channel A | n.c. |
|             | ADDR (protection cap)                        | connection for ASi-5 addressing plug |                            |              |                           |              |      |
|             | <b>Configuration as: 4 x 1-channel input</b> |                                      |                            |              |                           |              |      |
|             | X1   | C1A/C1B                              | 24 V <sub>out of ASi</sub> | Status 1     | 0 V <sub>out of ASi</sub> | Pulse 1 +    | n.c. |
|             | X2   | C2A/C2B                              | 24 V <sub>out of ASi</sub> | Status 2     | 0 V <sub>out of ASi</sub> | Pulse 2 +    | n.c. |
|             | X3   | C3A/C3B                              | 24 V <sub>out of ASi</sub> | Status 3     | 0 V <sub>out of ASi</sub> | Pulse 3 +    | n.c. |
|             | X4   | C4A/C4B                              | 24 V <sub>out of ASi</sub> | Status 4     | 0 V <sub>out of ASi</sub> | Pulse 4 +    | n.c. |
|             | ADDR (protection cap)                        | connection for ASi-5 addressing plug |                            |              |                           |              |      |

### Mounting according to cable direction

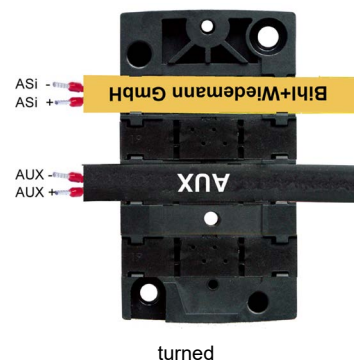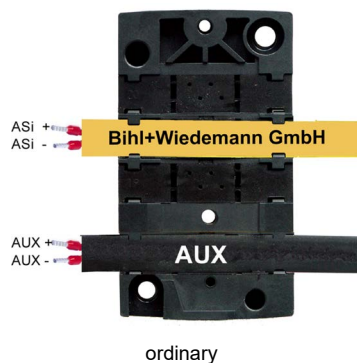

### Line termination with sealing profiles / as junction

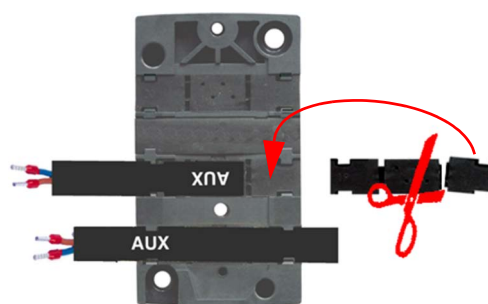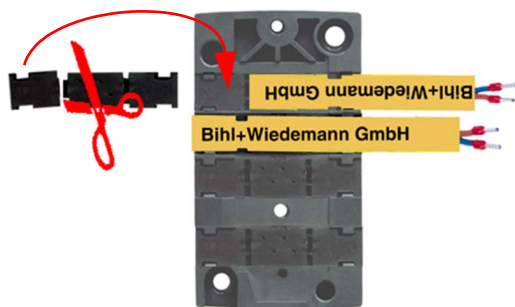

### Accessories:

- ASi substructure module for 4 channel module in 45 mm housing (art. no. BWU2349)
- ASi substructure module (CNOMO) for 4 channel module in 45 mm housing (art. no. BWU2350)
- Universal protection cap ASi-5/ASi-3 for M12 sockets, IP67 (art. no. BW4056)
- Sealing profile IP67 (IDC plug), 45 mm (art. no. BW3283)
- ASi-5/ASi-3 Address Programming Device (art. no. BW4925)