


## Overview adapter for Speed Monitor

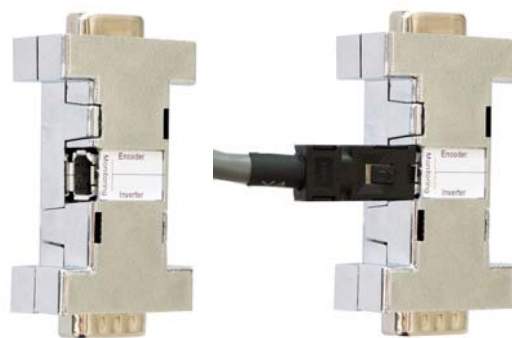

The adapters are designed for attachment between frequency in-verter and feedback cable. All pins are wired 1:1.

The connection for speed monitoring is led laterally out.

| Article no.   | Plug type | Pole connector | Pole socket | Output Speed Monitor   | Pin Sin | Pin Sin | Pin Cos | Pin Cos | GND | Suitable for e.g.            |
|---------------|-----------|----------------|-------------|------------------------|---------|---------|---------|---------|-----|------------------------------|
| <b>BW2497</b> | Sub-D     | 9              | 9           | AMP Mini-I/O connector | 2       | 1       | 4       | 3       | 9   | Elau MC-4                    |
| <b>BW2499</b> | Sub-D     | 15             | 15          | AMP Mini-I/O connector | 3       | 11      | 1       | 9       | 2   | B+R Acopos Sin Cos Interface |

Further occupancy possibilities are available on request.

### Accessories:

Connecting cable 1,5 m, plug-plug (art. no. BW2494)