

# ASi motor module for 2 x 24 V motorized rollers, 2M/2I

## ASi motor module 2I/2M

### suitable for

- 2 x 24 V motorized rollers Interroll EC5000 AI (with 20 W/35 W)
- 2 x 24 V motorized rollers Itoh Denki (PM500XC/XK)
- 2 x 24 V motorized rollers Rulmeca (RDR BL-3)

### 2 x digital inputs for sensor connection

### 2 x digitals and 2 x analog outputs for motor control

### Mixed input/output node

### Speed setting of ASi parameter

### Protection category IP67



(figure similar)



Figure	Drive <sup>(1)</sup>	Number of drives	Line protection fuse <sup>(2)</sup>	Inputs digital	Outputs digital	Input voltage (sensor supply) <sup>(3)</sup>	Output voltage (actuator supply) <sup>(4)</sup>	Connection	ASi connection <sup>(5)</sup>	Article No.
	Interroll; Itoh Denki; Rulmeca	2	yes (4,5 AT)	2	—	out of ASi	out of AUX	4 x M12 sockets, 5 poles	ASi profile cable	<b>BWU4205</b>

**(1) Drive:**

Under certain circumstances also suitable for control of motorized rollers from other manufacturers with the same technical data, e.g. MTA MRA50 or Pulseroller IDC. Please compare the manufacturer's specifications with the current values and the pin assignment of the motor module.

**(2) Line protection fuse:**

In the motor module UL approved fuses are placed before each of the motor supply connections. A short circuit in the motor causes this fuse to blow, protecting the connection cable between the module and motor.

After blowing the not exchangeable fuse the module is no longer functional and the module needs to be replaced. The characteristics of the fuse must be checked against the motor data before using the module.

The protection circuit in the module allows a very simple protection of the motor cables. The fuse for the cable protection is a slow-blow one; without short circuit the robust behavior of the module remains.

**(3) Input voltage (sensor supply):**

Inputs are supplied by ASi or by AUX (auxiliary 24 V power). If supplied by ASi, inputs shall not be connected to earth or to external potential.

**(4) Output voltage (actuator supply):**

Outputs are supplied by ASi or by AUX (auxiliary 24 V power). If supplied by ASi, outputs shall not be connected to earth or to external potential.

**(5) ASi connection:**

The connection to ASi as well to AUX (auxiliary 24 V power) is made via yellow resp. black ASi profile cable with piercing technology or via M8 socket.

# ASi motor module for 2 x 24 V motorized rollers, 2M/2I

<b>Article no.</b>	<b>BWU4205</b>
<b>General data</b>	
Motorized rollers	2 x Interroll (EC5000 AI, 24V, 20 W/35 W) 2 x Itoh Denki (PM500XC/XK) 2 x Rulmeca (RDR BL-3) <sup>(1)</sup>
<b>Connection</b>	
ASi/AUX connection	profile cable and piercing technology
Periphery connection	M12
<b>ASi</b>	
Profile	S-7.A.7, ID1 = 7 (fixed)
Address	AB address
Required Master profile	≥M4
As of ASi specification	3.0
Operating voltage	30 V (18 ... 31.6 V)
Max. current consumption	200 mA
<b>AUX</b>	
Voltage	24 V (18 ... 30 V)
Max. current consumption	at 20 W: 2,8 A continuously, 6,0 A peak at 35 W: 4,8 A continuously, 11,0 A peak
<b>Input</b>	
Number	2
Power supply	out of ASi
Power supply of attached sensors	120 mA
Switching threshold	U <sub>in</sub> < 5 V (low) U <sub>in</sub> > 10 V (high)
<b>Drive</b>	
Number	2
Power supply	out of AUX (galvanic separation)
Overload voltage tolerated by reaction (AUX)	35 V-resistant brake chopper compatible
Max. output current	10 mA per pin
Supply of motors	out of AUX per motor: 1,4 A continuously at 20 W per motor: 2,4 A continuously at 35 W
Line protection fuse	yes, separately for each motor, 4,5 AT, at 9 A (200%) release between 1 s and 120 s, fuse UL certified <sup>(2)</sup>
<b>Display</b>	
LED ASI (green)	on: ASi voltage on off: no ASi voltage
LED FLT/FAULT (red)	on: no data exchange flashing: peripheral fault <sup>(3)</sup>
LED AUX (green)	on: 24 V DC AUX off: no 24 V DC AUX
LEDs I1, I2 (yellow)	state of inputs I1, I2
LEDs M1, M2 (yellow)	state of motors M1 (O1), M2 (O3)


# ASi motor module for 2 x 24 V motorized rollers, 2M/2I

<b>Article no.</b>	<b>BWU4205</b>
<b>Environment</b>	
Applied standards	EN 61000-6-2, EN 61000-6-4, EN 60529
It can be used with a switched AUX cable, which is passively safe up to SIL3/PLe	yes <sup>(4)</sup>
Operating altitude	max. 2000 m
Operating temperature	-30 °C ... +55 °C (up to max. +70 °C) <sup>(5)</sup>
Storage temperature	-25 °C ... +85 °C
Housing	plastic, for DIN rail mounting or for screw mounting <sup>(6)</sup>
Protection category	IP67 <sup>(7)</sup>
Isolation voltage	≥ 500 V
Weight	100 g
Dimensions (W / H / D in mm)	45 / 80 / 42

(1) suitable for transmission rates 24:1, 36:1, 49:1, 64:1, 96:1 (not suitable for transmission rates 12:1, 16:1)

(2) In the motor module UL approved fuses are placed before each of the motor supply connections. A short circuit in the motor causes this fuse to blow, protecting the connection cable between the module and motor. After blowing the not exchangeable fuse the module is no longer functional and the module needs to be replaced. The characteristics of the fuse must be checked against the motor data before using the module.

The protection circuit in the module allows a very simple protection of the motor cables. The fuse for the cable protection is a slow-blow one; without short circuit the robust behavior of the module remains.

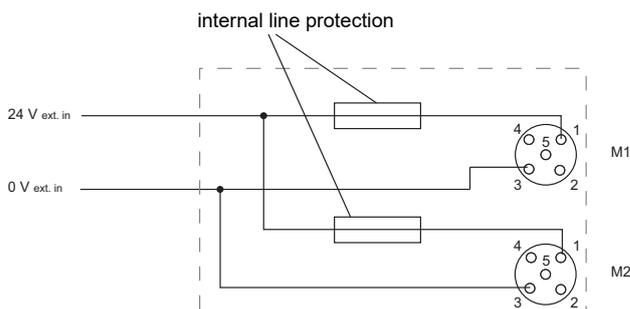

(3) see Table , “Peripheral fault indication,” on page 3“.

(4) The module is suitable for use in paths with a passively safe-switched AUX cable, since an exclusion of errors can be assumed for the connection of the two ASi and AUX potentials.

(5) Maximum ambient operating temperature +55 °C according UL certificate for the use in the USA and Canada

(6) Depending on substructure module (see accessories). The substructure module is not included in the scope of delivery.

(7) Protection category IP67 can only be achieved if all open connections are sealed with suitable end caps fulfilling the same protection category.

Article no.	Peripheral fault indication			
	Overload output	AUX voltage missing	Overload sensor supply	at least 1 motor fuse is blown
<b>BWU4205</b>	•	•	•	•

<b>UL-specifications (UL508)</b>	
<b>BWU4205</b>	
External protection	An isolated source with a secondary open circuit voltage of $\leq 30 V_{DC}$ with a 3 A maximum over current protection. Over current protection is not required when a Class 2 source is employed.
In general	UL mark does not provide UL certification for any functional safety rating or aspects of the above devices.

# ASi motor module for 2 x 24 V motorized rollers, 2M/2I

## Programming

Article no.	ASi bit assignment			
	D3	D2	D1	D0
	input			
BWU4205	Error M2	Error M1	I2	I1

Article no.	ASi bit assignment			
	D3	D2	D1	D0
	output			
BWU4205	CW M2	Start/Stop M2	CW M1	Start/Stop M1

Configuration analog-value O1/O3				
Parameter bit			Start/Stop M1/M2 (O1/O3)	BWU4205
P2	P1	P0		Speed M1/M2 (Pin 5)
0	0	0	0	0 V
			1	2,3 V
0	0	1	0	0 V
			1	3,4 V
0	1	0	0	0 V
			1	4,5 V
0	1	1	0	0 V
			1	5,6 V
1	0	0	0	0 V
			1	6,7 V
1	0	1	0	0 V
			1	7,8 V
1	1	0	0	0 V
			1	8,9 V
1	1	1	0	0 V
			1	10 V

## Pin assignment

Signal name	Explanation
Ix	digital input x
CW Mx	Direction of rotation of motor x (CW = 24 V, CCW = 0 V)
Error Mx	Indicating error at motor x (error = High Impedance; no error = 0 V)
Speed Mx	Speed of motor x
24 V <sub>ext out</sub>	Power supply, out of external voltage, positive pole (AUX, actuator supply)
0 V <sub>ext out</sub>	Power supply, out of external voltage, negative pole (AUX, actuator supply)
ASi+, ASi-	connection to ASi bus
24 V <sub>out of ASi</sub>	Power supply, out of ASi, positive pole (sensor supply)
0 V <sub>out of ASi</sub>	Power supply, out of ASi, negative pole (sensor supply)
n.c.	not connected

# ASi motor module for 2 x 24 V motorized rollers, 2M/2I

Connections								
Article no.	M12 connection	Name	Function	Pin1	Pin2	Pin3	Pin4	Pin5
BWU4205	X1	I1	input 1	24 V <sub>out</sub> of ASi	n.c.	0 V <sub>out</sub> of ASi	I1	n.c.
	X2	I2	input 2	24 V <sub>out</sub> of ASi	n.c.	0 V <sub>out</sub> of ASi	I2	n.c.
	X3	M1	motor 1	24 V <sub>ext</sub> out	CW M1 (0: 0 V; 1: 24 V)	0 V <sub>ext</sub> out	Error M1 (0: 0 V; 1: high Z)	Speed M1
	X4	M2	motor 2	24 V <sub>ext</sub> out	CW M2 (0: 0 V; 1: 24 V)	0 V <sub>ext</sub> out	Error M2 (0: 0 V; 1: high Z)	Speed M2
	ADDR (protection cap)	connection for ASi-3 addressing plug						

## Accessories:

- Connection cable for Itoh Denki Motor Rollers, M12 cable plug, straight, 5 poles to M8 snap-in cable socket, straight, 5 poles, cable length 2 m (art. no. BW2755)
- Connection cable for Itoh Denki Motor Rollers, M12 cable plug, straight, 5 poles to M8 snap-in cable socket, straight, 5 poles, cable length 1,2 m (art. no. BW3030)
- ASi substructure module for 4-channel module in 45 mm-housing (article no. BW2349)
- ASi substructure module (CNOMO) for 4-channel module in 45 mm-housing (article no. BW2350)
- Universal protection cap ASi-5/ASi-3 for M12 sockets, IP67 (art. no. BW4056)
- Sealing profile IP67 (IDC plug), 45 mm (art. no. BW3283)
- ASi-5/ASi-3 Address Programming Device (art. no. BW4925)
- It is recommended to use pre-assembled cables to connect the motors to the module.